

KBHR12380 12V 38Ah



The Kaise HR batteries were specially designed for applications that demand a very high energy output. With an optimized design of the grids and an excellent formula for pasting the plates, the HR series can deliver up to 40% more than the standard series.




Performance Characteristics

Nominal Voltage	12V		
Dimensions	Length (mm / inch)	197 / 7.560	
	Width (mm / inch)	168 / 6.50	
	Height (mm / inch)	170 / 6.69	
	Total Height (mm / inch)	170 / 6.69	
Approx Weight	(Kg / lbs) 11.4/ 25.1		
Design Life	10 years		
Terminal	M6		
Container Material	ABS		
Rated Capacity	125Watts / Cell	(15min, 1.67V / cell, 25°C / 77°F)	
	38Ah	(10hr, 1.80V / cell, 25°C / 77°F)	
Max. Discharge Current	550A (5s)		
Internal Resistance	Approx 7.0mΩ		
Operating Temp. Range	Discharge: -15 ~ 55°C (5 ~ 131°F)		
	Charge : 0 ~ 40°C (32 ~ 104°F)		
	Storage : -15 ~ 40°C (5 ~ 104°F)		
Nominal Operating Temp. Range	25 ± 3°C (77 ± 5°F)		
	Cycle Use	Initial Charging Current less than 28.5A. Voltage: 14.4V ~ 14.7V at 25°C (77°F) Temp. Coefficient: -30mV/°C	
Standby Use	No limite on Initial Charging Current Voltage 13.5V ~ 13.8V at 25°C (77°F) Temp. Coefficient -20mV/°C		
Capacity affected by Temperature	40°C (104°F)	103%	
	25°C (77°F)	100%	
	0°C (32°F)	86%	
Self Discharge	Fully charged Kaise High Rate Series batteries may be stored for up to 6 months at 25°C (77°F) and then a freshening charge is required. For higher temperatures the time interval will be shorter.		

Discharge Constant Current (Amperes) at 77°F (25°C)

Volts/cell	10min	15min	30min	1h	3h	5h	10h	20h
1.80V	62.8	53.5	37.7	22.9	9.55	6.39	3.65	1.89
1.75V	69.5	58.0	39.3	23.6	9.81	6.56	3.72	1.92
1.70V	75.4	62.1	40.7	24.2	10.1	6.71	3.79	1.94
1.67V	80.5	66.0	41.8	24.7	10.3	6.84	3.85	1.97
1.60V	84.8	68.7	42.9	25.1	10.5	6.96	3.89	1.99

Dimensions and Terminal (Unit: mm (inches))

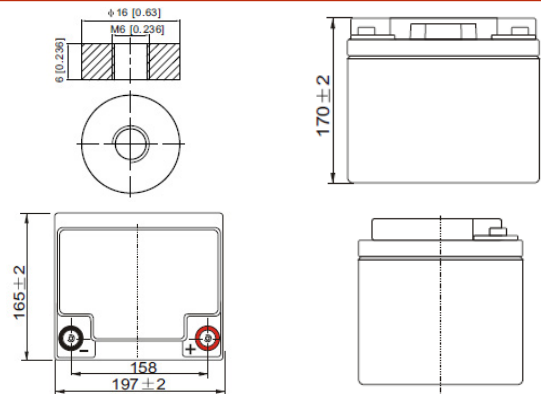

Applications

UPS
High power backup supply
Electric facilities
Power tools

Certifications

ISO 9001:2008 ISO 14001:2008



Discharge Current vs. Discharge Voltage

Final discharge voltage V/CELL	1.8	1.75	1.7	1.6
Discharge current (A)	I ≤ 0.1CA	0.25CA ≥ I > 0.1CA	0.55CA ≥ I > 0.25CA	I > 0.55CA

Discharge Constant Power (Watts per cell) at 77°F (25°C)

Volts/cell	10min	15min	30min	1h	3h	5h	10h	20h
1.80V	120.3	103.3	73.8	45.4	19.0	12.9	7.44	3.87
1.75V	132.5	111.4	76.6	46.4	19.6	13.2	7.54	3.89
1.70V	143.1	118.5	78.7	47.3	20.0	13.4	7.63	3.92
1.67V	151.6	125.0	80.4	48.1	20.3	13.6	7.69	3.94
1.60V	158.1	128.8	81.6	48.6	20.5	13.7	7.74	3.96

(Note) The above characteristics data are average values obtained within three charge/discharge cycles not the minimum values.

2018/07/L

Contacto
energy@tempelgroup.com
www.tempelgroup.com

Tempel Group en el mundo
BARCELONA · MADRID · VALENCIA · BILBAO · SEVILLA · LISBOA · PORTO · BUENOS AIRES · LIMA
SANTIAGO DE CHILE · BOGOTÁ · SÃO PAULO · CIUDAD DE MÉXICO · CIUDAD DE PANAMÁ · MONTEVIDEO
· QUITO



tempel
group